


QLF PRO2K

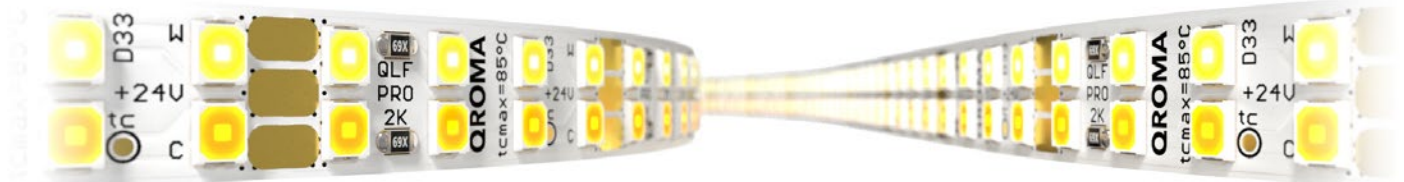

Technical data

Date Code	D33
Voltage	24 VDC
Power	(2x) 15 W/m
Number of Led	266 LED/m
Spectrum	2200K ... 6500K
Cri	80+
Binning	3-step MacAdam
Lifetime	L80B10 50'000 h
Dimming	PWM & CC
Protection	Reverse Polarity, ESD (HBM) 1000 V
Ambient Temperature	-10 °C ... +50 °C
Operating Temperature	tc ponit max. 85 °C
Humidity Range	10 ... 90 %RH (non-condensing)
Beam Angle	120°
Packing	5 m/Reel
IP Grade	IP20
Environment	Indoor use only
Max Run	5 m
Connection	Solder pads
Material	FPC with 3M adhesive tape
Bending	Radius > 50 mm
Certificate	CE, RoHS, UL
Made in	PRC
Designed in	Switzerland
Warranty	2 years

QLF PRO2K

Dimensions

Pitch	7.5 mm
Width	10 mm
Height	2 mm
Cutting Step	30 mm

